



marantz®

Product information

MELODY MUSIC (M-CR503)



If you're looking for a compact all-in-one music player that looks as great as it sounds, then look no further. The Marantz high-quality lifestyle Melody Music will dazzle you in both look & feel as well as in audio reproduction. Inside the stylish aluminium cabinet, finished with a high-gloss black cover, the Melody Music has the technology to play all your digital music as well as your favourite FM radio stations with RDS information – and all with a powerful 60W rms x2ch into 6 ohm or 30W rms x4ch into 6ohm. It will play your CDs and your MP3 and WMA files, even those stored on a USB device, iPod or an iPhone. You can even hook up your PC via the M-Xport for Bluetooth wireless audio with optional RX101. All of which means high-quality music from almost any source. Enjoy it in your main room, via headphones or in a multi-room set-up – you can even expand the system with subwoofer and satellite speakers. Almost anything is possible with this amazing compact and powerful CD Receiver.

Main Features


- 2x 60 Watts RMS (6 ohm)
- Built-in FM/AM tuner with RDS
- CD, CD-R/RW, MP3, WMA
- iPod/iPhone compatible USB input
- Front AUX input
- Speaker A/B

EAN

EU MCR503/N1SG 4951035042533
UK MCR503/T1SG 4951035043127

because music matters

MELODY MUSIC (M-CR503)

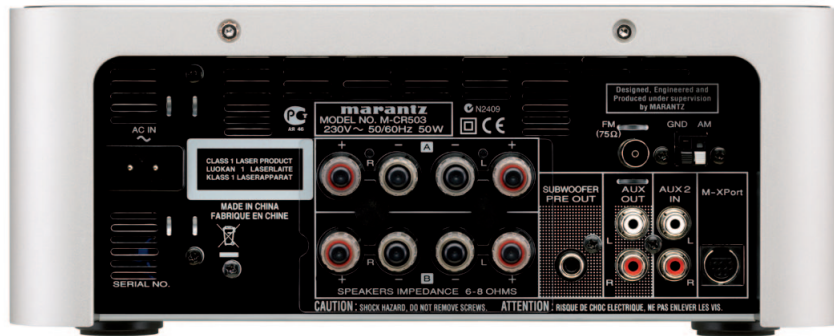

FEATURES	Melody Music
High quality power output	2x 60 Watts
CD Compatibility: CD/CD-R/RW/WMA/MP3	o / o / o / o / o
Tuner: DAB/DAB+/FM (RDS)/AM	- / - / o / o
Streaming audio from PC	-
Internet Radio	-
vTuner/Napster/last.fm	- / - / -
USB audio (front)/Made for iPod/Works with iPhone	o / o / o
DLNA certified	-
Compatible streaming file types: MP3/WMA/AAC/LPCM/WAV/FLAC	- / - / - / - / - / -
Bluetooth audio A2DP (via RX101)	optional
Auto tuning	o
Presets	99
Tone Control: Bass/Treble/Balance	o / o / o
Clock	o
Sleep Timer	o
Programmable Timer: Once/Daily/Weekday	o / o / -
INPUTS/OUTPUTS	
AUDIO	
Analogue In/Out	2 / 1
Digital Optical In/Out	- / -
OTHER	
AUX-input (front)	1
M-XPort for RX101	o
iPod/iPhone compatible USB input (front)	o
Subwoofer PreOut	o
Speaker Terminal: click fit/screw	- / o
Headphone Out	o
iPod input (direct/docking station)	o / o
Marantz remote bus	o
Speaker A/B	o
Bi-amping	o
Powered multiroom for one extra room	o

SPECIFICATIONS	
AUDIO SECTION	
Power Output	60 Watts (6 ohm rms)
Number of Channels	2
Frequency Response (Analogue In)	5Hz-22kHz
Signal to Noise Ratio (audio)	86dB
Total Harmonic Distortion	0.05%
DAB+ SECTION	
Receiving Range (Band III/Band L)	-
Signal to Noise Ratio	-
Total Harmonic Distortion	-
Frequency Response	-
Stereo Separation	-
DAB SECTION	
Receiving Range (Band III/Band L)	-
Signal to Noise Ratio	-
Total Harmonic Distortion	-
Frequency Response	-
Stereo Separation	-
TUNER SECTION FM	
Frequency Range	87.5-108MHz
Signal to Noise Ratio (Mono/Stereo)	65dB/60dB
Total Harmonic Distortion (Mono/Stereo)	0.8%/1.0%
GENERAL	
Available Colors: Gold/Silver/Black/Silvergold	- / - / - / o
Metal Front Panel	o
Remote Control	RC008CR
Power Consumption in W	50
Standby Consumption in W	0.4
DAB Antenna included	o
Maximum Dimensions (WxDxH) in mm	280x302x111
Weight in kg	4.1

because music matters